
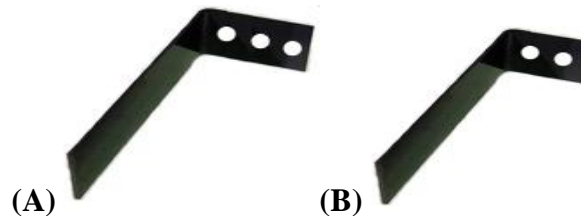


ATV Feeder/Seeder Directions

1. Mount the two 7" brackets **(A)** to the back of the feeder with the included nuts and bolts (4 each).
2. Then mount the 6" brackets **(B)** to the underside of the 7" brackets **(A)** to the thickness needed to fit the rear of your ATV or Pickup bed. Use the 4 nuts and bolts remaining to connect L-Brackets.
3. The dispenser door is opened and closed manually.

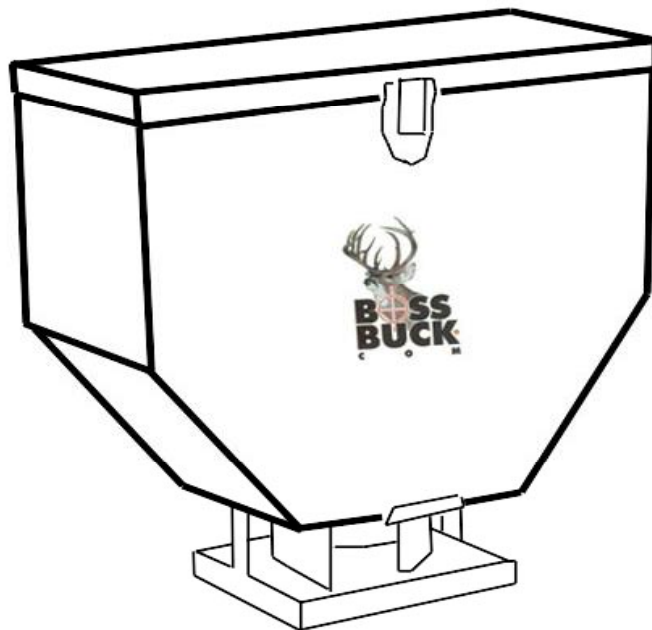

4. Optional push button (if ordered) has cigarette lighter plug.
5. You can adjust the rate of spread by adjusting the spinner cup up and down, and adjusting the dispenser port. The necessary flow will vary with the diameter of your feed, seed, or fertilizer.